Handheld acoustic imaging camera

Model: VS138X



Handheld acoustic imaging camera is a specialized device for measuring the distribution of acoustic fields within a certain range using an acoustic array.

The position of the acoustic source and the state of radiation intensity are measured and the colour cloud map shows visual acoustic field images, i.e., acoustic imaging measurements.

The detector not only features the sound positioning of traditional acoustic cameras, but also specific partial discharge and compression.

The gas leak scene is analysed for detection.

The instrument supports the audio and ultrasound bands, which can be used for sound source positioning, abnormal sound testing, tracking of acoustic tracks, etc.

For stable or high transient acoustic sources, static or motion objects can achieve excellent detection effects, which are currently applied mainly to compressed gases

This is the case with the leak detection and the partial discharge test.

The company retains the right to design and specify the product, without further notice, and all information has been carefully checked, and the company will not assume responsibility for any printing errors As a consequence, printing may lead to a slight difference between the product and the material in the information, all the parameters concerned being for reference purposes only, and the specific parameters should be based on the product label.

Main functions

Soundfield Imaging	**Query test**	**PRPD Mapping**	**Queue Type Analysis**
Leak-detection function	**Estimation function for leakage**	**Multiplier numeric focus**	**Laser ranging function**
Argument regulation function	**Photography video function**	**Self-checking devices**	**Single Target/Multi-Target Testing**
File management function	**Upgrade remote systems**	**Multilingual Switch**	**Intelligent online/offline analysis**

Product characteristics


The sonar is designed as one. No additional cameras required.

It's light-looking, hand-held, ready to be used anywhere.

Zero-monitoring bands wide, with audio and ultrasound coverage

The image is fast, stable, ghostless.

Appearance Size

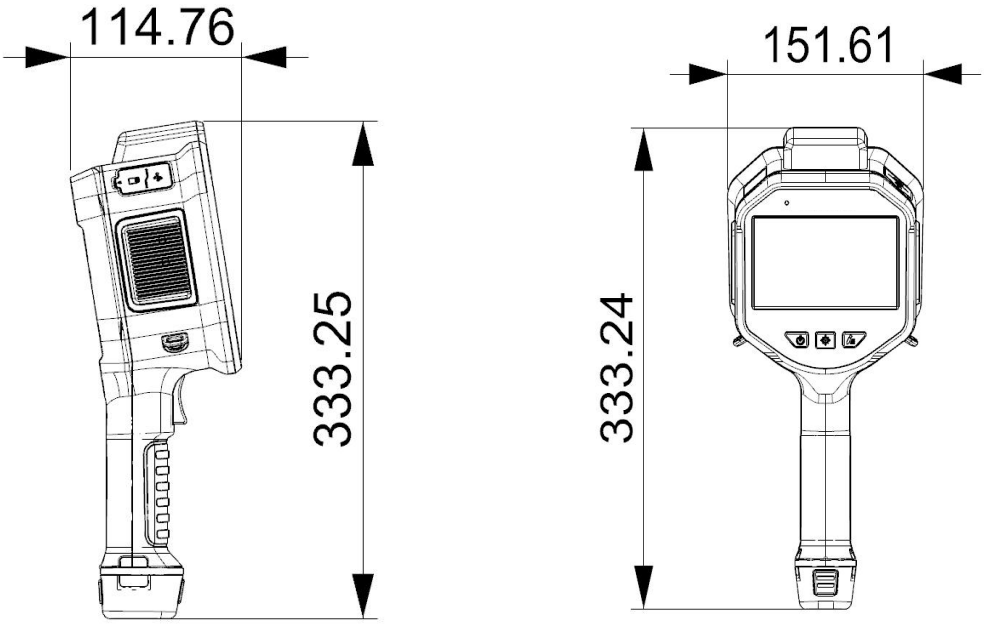

VS138X product appearance

Technical indicators

Parameter Type	Parameter indicators

The company retains the right to design and specify the product, without further notice, and all information has been carefully checked, and the company will not assume responsibility for any printing errors As a consequence, printing may lead to a slight difference between the product and the material in the information, all the parameters concerned being for reference purposes only, and the specific parameters should be based on the product label.

Model	VS138X
acoustic imaging Parameters	
Sensor Type	MEMS digital microphone
Sensor sensitivity	-26±1 dBFS
Number of sensors	138 Channel
Frequency range	2kHz~100kHz
Test Distance	0.3m~150m
Image frame rate	30FPS
Scan Precision	≤1°
Position error	≤1cm@1m，40kHz
Sound pressure level measurement sensitivity	10KHz：2dB SPL　20kHz：-5dB SPL　40kHz：-8dB SPL 60kHz：-5dB SPL　80kHz：25dB SPL　100kHz：35dB SPL
Leak measurement sensitivity	≤0.05 L/min@10m，1.2bar
Measurement and analysis function	
Measurement Mode	Support for station-laying, leak-measurement, isometric mode
Gas leakage estimates	Support leakage rate and leakage loss estimates
Set Type Recognition	Support for tipping, rim, suspension, noise type recognition
PRPD Map	Suppo rt
Soundprint	Support spectrum, time spectrum
Data analysis	Support analysis and generation of analysis at end of the device
Distance measurements	Support high-precision laser ranging
Visible light camera	

The company retains the right to design and specify the product, without further notice, and all information has been carefully checked, and the company will not assume responsibility for any printing errors As a consequence, printing may lead to a slight difference between the product and the material in the information, all the parameters concerned being for reference purposes only, and the specific parameters should be based on the product label.

Beijing Garexon Technology Co., Ltd.technical specifications

FOV	72°±3°
Focal length	Fixed Focus 3.9mm
Pixels	1300W
Image Storage	
Image Resolution	3840*2160； 1920*1080
Video Resolution	1920*1080
Video frame rate	30FPS
Storage capacity	128GB Micro SD card
Document Remarks	Support text, voice, image, label comments
Image Display	
Screen Size	5 in LCD screen
Screen Resolution	1280*720
Touch screen type	Capacitive
Screen Brightness Reconciliation	Support manual and automated reconciliation
Digital Focus	Support 1/2/4/8 multiple
Image Frame Rate	30FPS
Soundfield Mode	Supporting acoustic cloud maps and sound source tags
Image range	Support full screen and centre area, area sizes are adjustable
Soundfield Colours	Support for rainbows, iron red, white heat, etc.
Physical and electrical parameters	
Product size	333mm*152mm*115mm

The company retains the right to design and specify the product, without further notice, and all information has been carefully checked, and the company will not assume responsibility for any printing errors As a consequence, printing may lead to a slight difference between the product and the material in the information, all the parameters concerned being for reference purposes only, and the specific parameters should be based on the product label.

Beijing Garexon Technology Co., Ltd.technical specifications

Product weight	< 1kg
Battery capacity	≥4500mAh,7.2V
Power adapter	Type-C interface to support PD fast-filling
Charge Method	USB Type-C or Fill
SD card interface	Support for SD card plugin
Lighting	Suppo rt
Laser ranging	0.1~20m
Electronic compass	Suppo rt
Button	Triggers, laser ranging, light patches, custom keys
WIFI	IEEE 802.11a/b/g/n/ac 2.4G&5G
Blueto oth	Support for BT4.2
System Functions	
Cloud services	Support data upload to cloud
Offline analysis	Support data export to offline analysis software analysis
System upgrade	Support local upgrades and OTA upgrades
File Transfer	Supports the transmission of files via USB, WIFI, Bluetooth
Device hibernation	Suppo rt
Audio listening	Support for listening to audio via Bluetooth headset
Other	
Working temperature	-20℃~+55℃
Storage temperature	-40℃~+85℃

The company retains the right to design and specify the product, without further notice, and all information has been carefully checked, and the company will not assume responsibility for any printing errors As a consequence, printing may lead to a slight difference between the product and the material in the information, all the parameters concerned being for reference purposes only, and the specific parameters should be based on the product label.

Work Humidity	**10% ~ 95%, not condensed**
Protection level	**Not less than IP54**
tripod interface	Support UNC 1/4-20 interface to connect tripods
System Language	Support for Chinese, Chinese, English, Russian, Spanish, German, French, Thai, **Italian, Turkish, etc.**
Box list	acoustic imaging camera, Battery x 2 block, Charger, Type-C charger, battery charger, wristband, Type-C U disks, equipment boxes, user manuals, certificates, warranty cards, plant inspection reports

Attention

- **Do not unauthorise or modify the equipment.**
- When there is stain on the surface, soft fabric and neutral detergent can be used to wipe.
- Equipment should be used in a way that avoids crowding and severe shocks.
- Pay attention to the regular clean-up of microphone arrays so as to avoid the dust blocking of sound holes affecting performance.

The company retains the right to design and specify the product, without further notice, and all information has been carefully checked, and the company will not assume responsibility for any printing errors As a consequence, printing may lead to a slight difference between the product and the material in the information, all the parameters concerned being for reference purposes only, and the specific parameters should be based on the product label.